




KRD SERIES

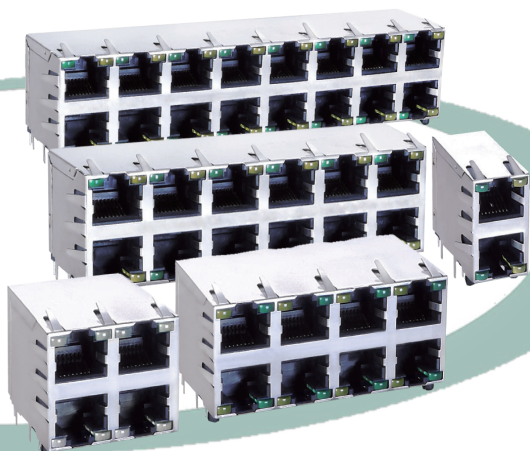

FEATURES AND BENEFITS

- Available in 2*1, 2*2, 2*3, 2*4, 2*6 and 2*8 ports
- Through Hole contacts
- Easy viewing LED as Power/Activity indicators
- Save PCB space and cost
- Available shielded/unshielded
- Minimum of 750 insertion cycles

APPLICATIONS

SERVER, HUB, SWITCH, STB, AMPLIFIER, AV CENTER, POS, PRINTER, SECURITY CAMERA, ROUTER

GENERAL SPECIFICATION

Product Type Features		Shielding Related Features	
Tab Type	Other	Material	Copper Alloy
PCB Mount Angle	Side Entry (Right Angle)	Plating	Nickel
PCB Mount Style	Through Hole	EMI Finger	With / Without
Number of Port	2x1/2x2/2x3/2x4/2x6/2x8	Number of PCB Ground Tabs	4
Shielded	With / Without	Ground Pin Position (mm)	Option
Number of Position	8	Magnetic Related Features	
Number of Contact	8	Transformer Speed	None
LED	Yes / No	Contact Related Features	
Transformer	None	Material	Phos-Bronze
Housing Related Features		Contact Area Plating	Hard Gold
Material	PBT / NYLON	Solder Area Plating	Gold Flash
Housing Flammability Rating	UL 94V-0		
Color	Option		

ORDER INFORMATION

Part No.	Port No.	Length	Width	Height
KRD-S-21-8-8-X	2 Port	27.9	16.45	25.4
KRD-S-22-8-8-X	4 Port	27.9	32.10	25.4
KRD-S-23-8-8-X	6 Port	27.9	47.85	25.4
KRD-S-24-8-8-X	8 Port	27.9	63.75	25.4
KRD-S-26-8-8-X	12 Port	27.9	95.10	25.4
KRD-S-28-8-8-X	16 Port	27.9	126.60	25.4

This information is believed to be accurate; however, no responsibility is assumed by KinnexA for its use, and no license or rights are granted by implication or otherwise in connection therewith. Specifications are subject to change without notice.

